

Component Test Plate



The Instron® Component Test Plate is designed to accommodate the trend of testing end products or components. Within the medical device industry, many test requirements are focusing on the actual quality and test performance of the end product in addition to the standard test requirements of the materials from which it is constructed. The Component Test Plate is used to determine the force limits in particular functional elements of products ranging from catheter delivery systems to buttons on diagnostic test instruments. Once oriented, the test component can be easily fixed to the base through the array of tapped holes. A force applicator (probe, hook, or clamp) can then be attached to the load cell. The combination of a fixed component and test force applicator generates valuable results for either quality or research and development groups. Additionally, the Component Test Plate simplifies the process of adapting custom-made grips and fixtures to the testing systems.

Features

- Allows for easy mounting of components
- Compatible with Instron standard base adapters (type O and D) for easy set up of grips and accessories
- M6 thread holes in a pattern 25 mm apart on center
- Versions available for Instron Single- or Dual-Column testing systems

Principle of Operation

The fixture can be used with Instron testing systems and consists of a single tapped plate with an array of M6 threaded holes.

A load force applicator, fixture, or device must be attached to the load cell, and is not supplied with the test plate. Please

consult Instron's custom engineering group for a full test solution for the test component if desired. The plate is also compatible with standard machinist vices available from an online catalog, such as McMaster-Carr®.

The location of the specimen on the plate should be selected such that the area of interest, where the load application occurs, is completely centered. If the load application is off-center it could potentially damage the load cell.


Instron provides load verification and IQ/OQ services that can be incorporated to simplify your internal validation processes. Instron ComplianceBuilder™ Software, an add-on compliance solution that can be integrated with Bluehill® Software, meets the regulatory guidelines found in FDA 21 CFR Part 11. Reports can be printed, sent by email, or saved for future viewing.

Specifications


Catalog Number	Compatible Frames Model Number	Capacity kN	Weight		Lower Fitting	Effective Height		Width		Depth	
			kg	lb		mm	in	mm	in	mm	in
CP104481	Single Column Systems 444x, 554x, and 584x	1	6	13.2	Mounts to base using 4 × M6 holes	13	0.51	600	23.62	300	11.81
2910-107	Dual Column Systems 446x, 336x, 556x, 556xA, and 596x	2	3	6.6	Mounts to base using 4 × M10 holes	13	0.51	300	11.81	300	11.81
2910-106	Single Column Systems 334x	1	5.5	12.1	Mounts to base using 4 × M6 holes	13	0.51	600	23.62	300	11.81
2910-105	Single Column Systems 554x and 594x	1	6.9	15.2	Mounts to base using 4 × M6 holes	53	2.09	600	23.62	300	11.81

Common Specifications

Upper Fitting: Grip load force applicator device or fixture (not included)

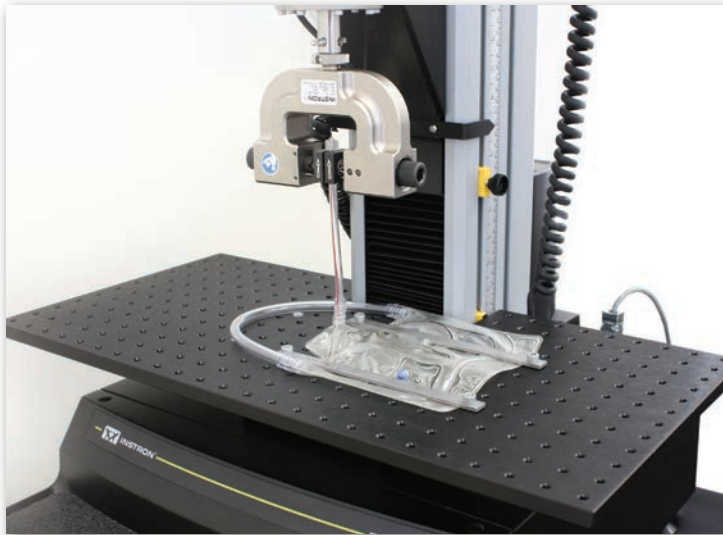

Tapped Test Plate Mounted on a Single Column Testing System

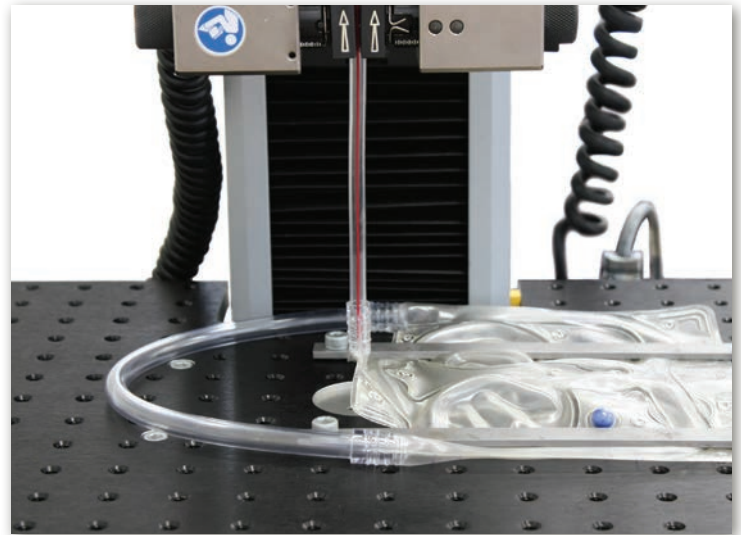

Close-Up of Tension Test on Medical Device Secured to the Test Plate

www.instron.com/accessories



Worldwide Headquarters
825 University Ave, Norwood, MA 02062-2643, USA
Tel: +1 800 564 8378 or +1 781 575 5000

Instron Industrial Products
900 Liberty Street, Grove City, PA 16127, USA
Tel: +1 724 458 9610

European Headquarters
Coronation Road, High Wycombe, Bucks HP12 3SY, UK
Tel: +44 1494 464646